

## PERFORMANCE

Environment Protection Standard:  
ISO 14001:2005

Quality Management Standard:  
ISO 13986:2004

FSC Certified.

## TECHNICAL SPECIFICATIONS

Class – Hardwood, non-durable

Glue Bond – A Bond Exterior

Glue Formaldehyde Emissions – E1

# Bendy Ply Meranti



Flexible Meranti plywood used to give shape and form to your projects. Plytech Bendy Ply is a 3 ply panel available in either long or cross grain configuration.

## SCOPE OF USE

Ideal for curved stair stringers. Marine construction such as around fly bridges and internal tight radiuses. Furniture, interior fittings, posts and columns. Curved wall and ceiling design.

## DIMENSIONS

2440 x 1220mm / 1220 x 2440mm – 4mm, 6mm.



## RECOMMENDATIONS FOR USE:


### 1. Follow the Marking

There is a preferential direction: ensure that the marking is on the inside of the bend



### 2. Test Gently

Test and bend gradually and smoothly

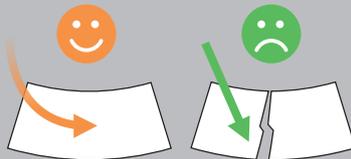

### 3. Humidify

Moisten the panel to facilitate bending



### 4. Tight Nailing

Nail tightly following the curvature and the edges of the panel



## PLYTECH SHOWROOM

26 Business Parade North, PO Box 204-070, Highbrook, Auckland 2161, New Zealand. Phone: 09 573 5016, Fax: 09 573 5035

[sales@plytech.co.nz](mailto:sales@plytech.co.nz)

While every endeavour has been made to ensure that all information contained in this product sheet is accurate, it is intended to be used as a guide line only. We reserve the right to amend specifications without notice. Product Warranty is as per our Standard Terms and Conditions of Trade.

# plytech