




# Plytech Crossflex Woven

*Our Plytech Crossflex is an interlacement of real wood veneer, hand made in Italy and applied to a special paper backing. Plytech Crossflex is a flexible sheet allowing for both flat and curved surface applications. Plytech Crossflex is extremely versatile in its applications and encourages creativity beyond the expected.*

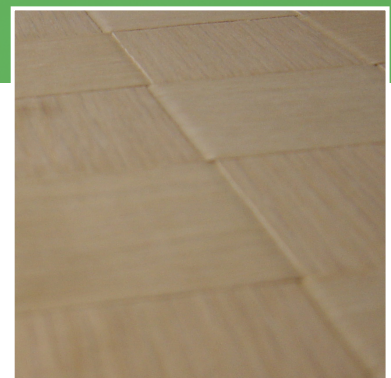

## Applications:

Ideal for use as feature panelling in kitchen and bathroom doors, interior doors, wall and ceiling coverings, bed-heads or any other highly creative application.

## Features:

European Beech  
American White Oak - Quarter Cut  
American White Ash - Crown Cut  
American Hard Maple - Quarter Cut.

## Technical Specifications:

The interwoven woodgrain veneer is pre-sanded and ready for clear finishing. The special paper impregnated backing acts as a barrier between adhesive and the woodgrain veneer. We do not advise the use of water-based coating to avoid "raising" of the woodgrain.

## Dimensions:

Thickness	Length x Width
0.6mm	2440 x 1220mm

## Glueing Process:

The Crossflex can be applied to any support by cold or hot glueing process with either vinyl, white, contact or dispersion glue. It is important that the temperature remains lower than 82° Celsius.

For further information contact us on **0800 900 905**

While every endeavour has been made to ensure that all information contained in this product sheet is accurate, it is intended to be used as a guide line only. We reserve the right to amend specifications without notice. Product Warranty is as per our Standard Terms and Conditions of Trade. Please contact us for further detailed information.

**plytech**  
CREATIVE STRENGTH